

# MARABOU

DESIGNED BY PROFESSIONALS

## NANO VITRIFIED TILES 600X600

EMAIL-[sybariticliving29@gmail.com](mailto:sybariticliving29@gmail.com)

MO-: 973744583 , 9737044561



8001



8002



8003



8004



8005



8007






8008





8009

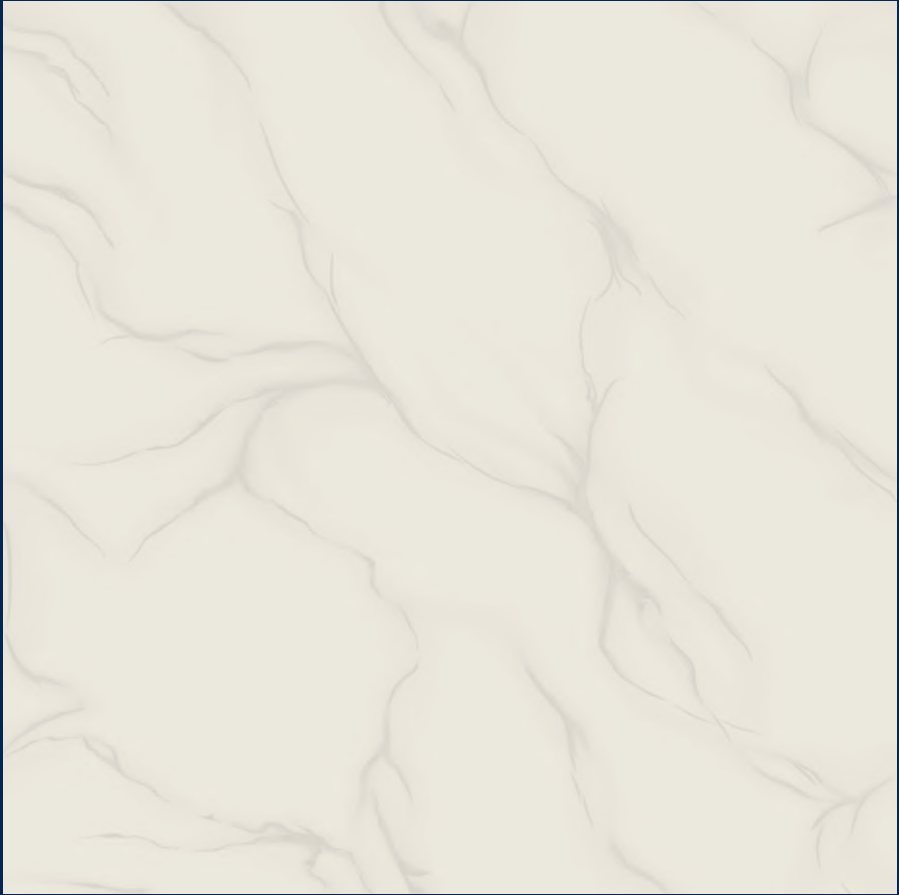

8010



8011




8012



8013



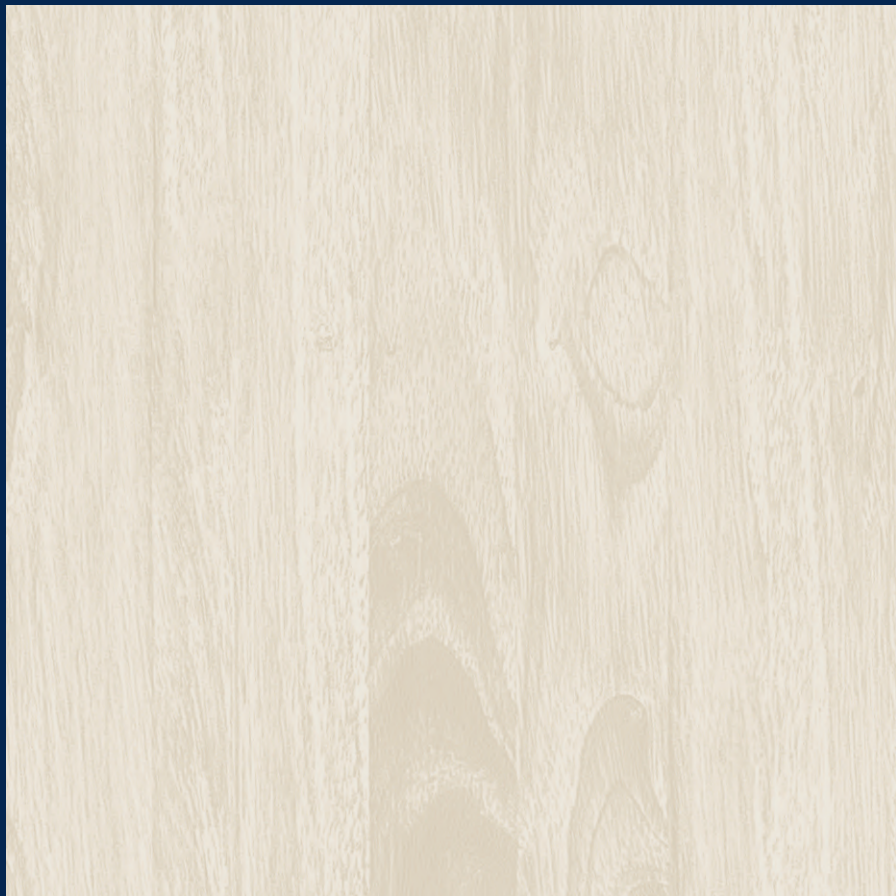

8014






8015



8016



8017

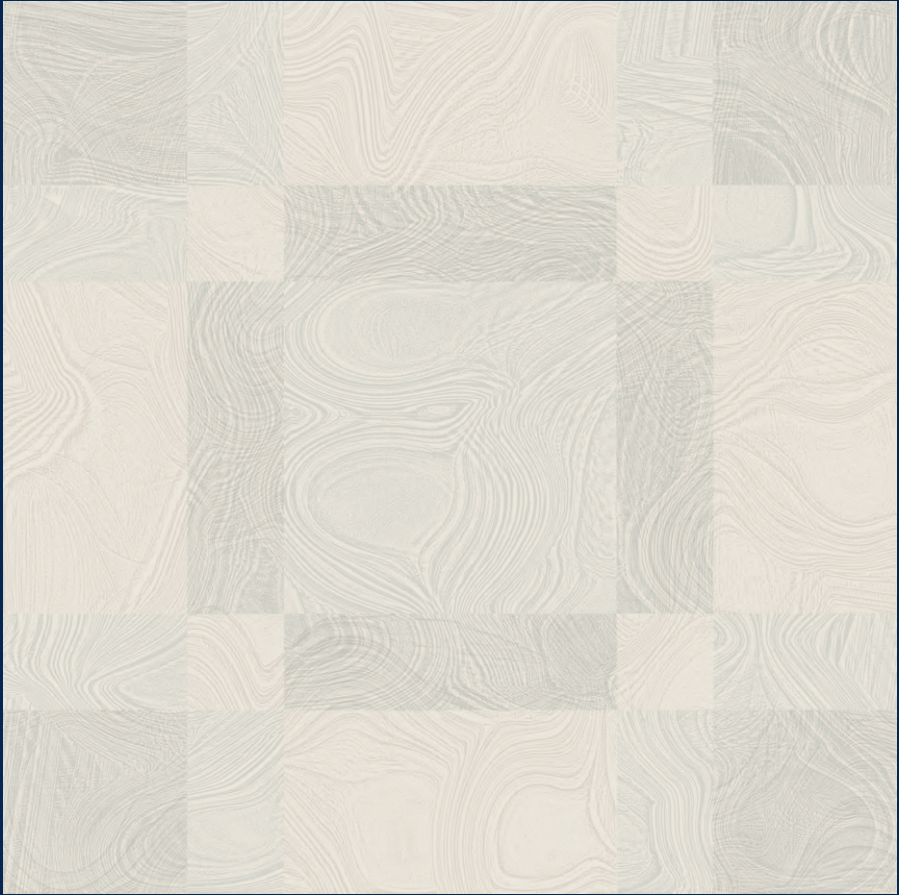

8018




8019





8020



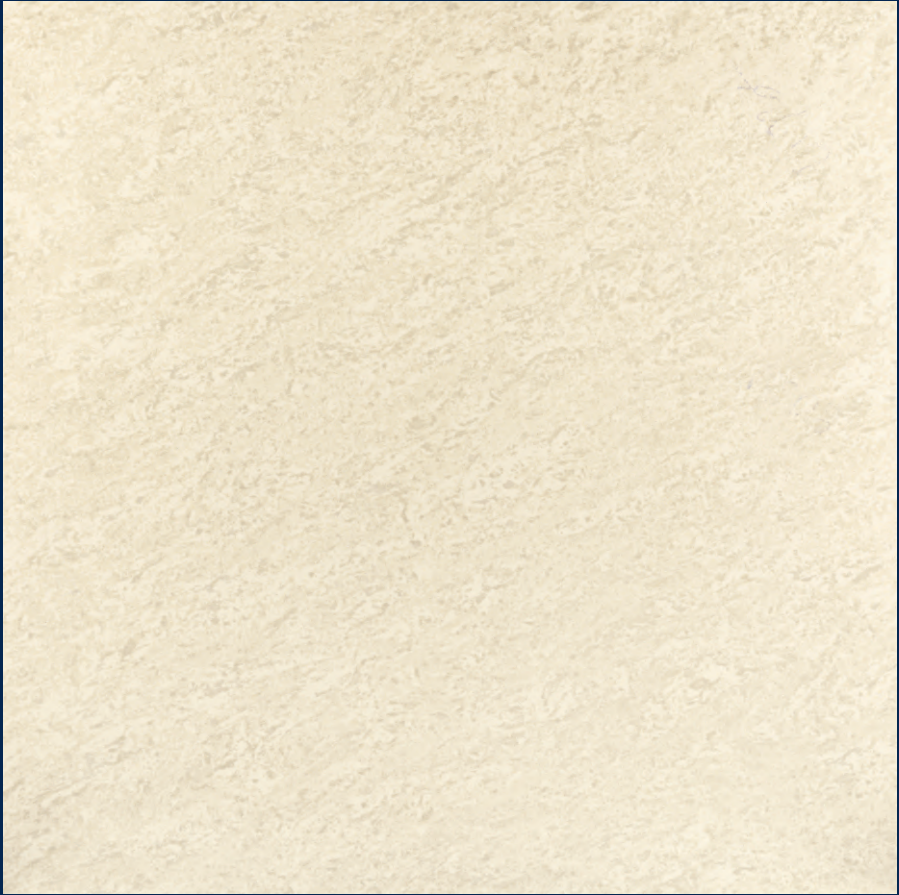


8021



8029



8034

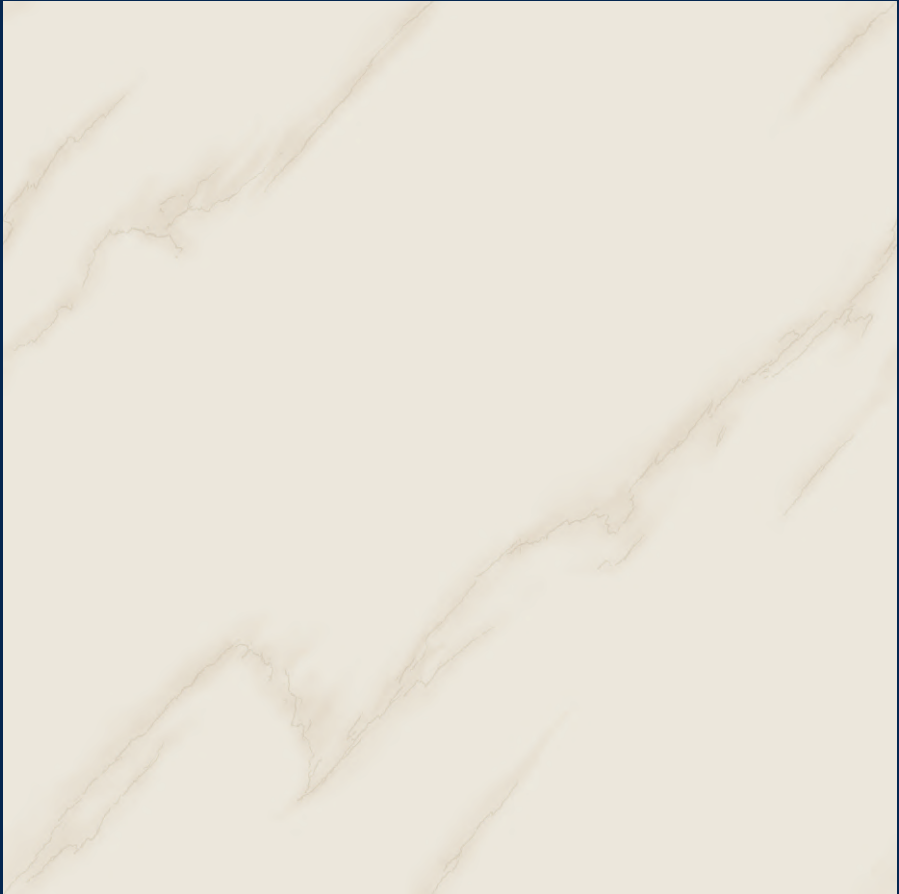

8037



8046



8047






8053




8054




8055

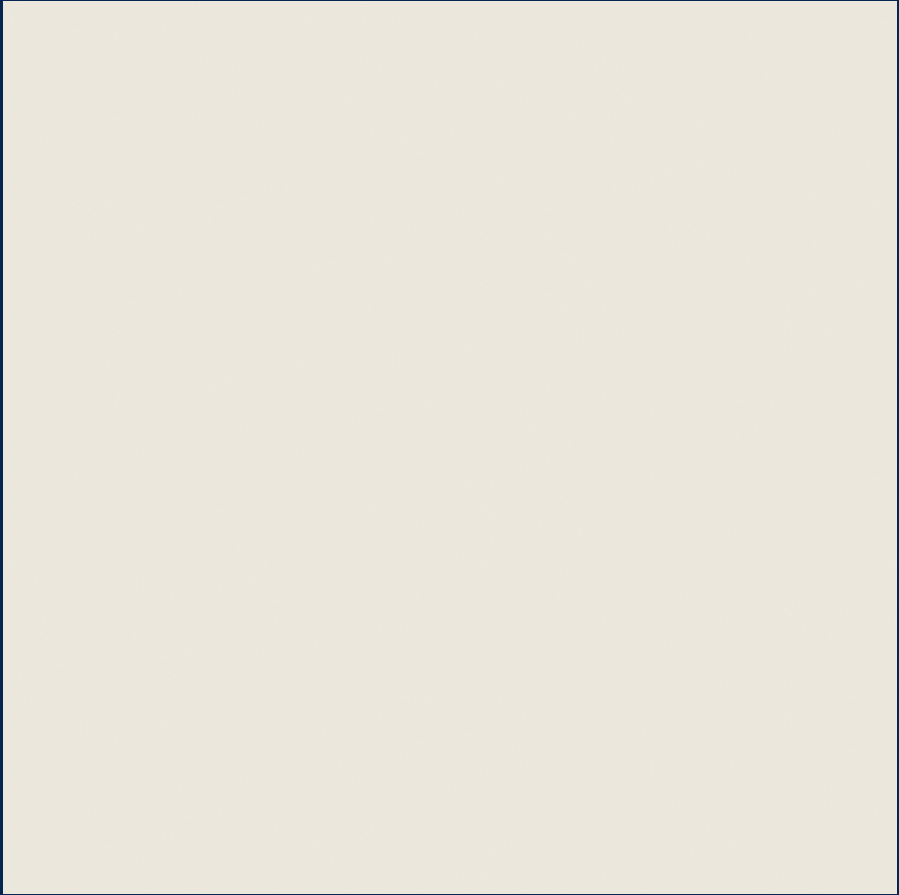

Ivory



Royal Gray



Italian White



## TECHNICAL SPECIFICATION

NO.	PROPERTY	INTERNATIONAL Std. ISO 3006/EN 176 Group B1a	OUR COMPANY	METHOD OF TESTING
1	Deviation in Length	±0.5 %	±0.1 %	EN 98
2	Deviation in Thickness	±0.5 %	±0.1 %	EN 98
3	Straightness of Sides	±0.5 %	±0.1 %	EN 98
4	Rectangularity	±0.5 %	±0.2 %	EN 98
5	Surface Flatness	±0.5 %	±0.2 %	EN 98
6	Water Absorption*	> 0.5%	> 0.03%	EN 99
7	Mohs Hardness*	> 6	> 8	EN 101
8	Flexural Straightness	> 27 N/mm <sup>2</sup>	> 47 N/mm <sup>2</sup>	EN 100
9	Abrasion Resistance	< 204 mm <sup>3</sup>	< 144 mm <sup>3</sup>	EN 102
10	Skid Resistance ( Friction Coefficient )	< 0.4	< 0.6	ASTM C-1028
11	Breaking Strength*	1113 N	2830 N	ASTM C-648
12	Density (g/cc)	> 2	2.4	DIN 51082
13	Frost Resistance	Frost Proof	Frost Proof	EN 202
14	Chemical Resistance	No. Damage	No. Damage	EN 106
15	Thermal Shock Resistance	No. Damage	No. Damage	EN 104
16	Color Resistance	No. Damage	No. Damage	DIN 51094
17	Stain Resistance	Resistance	Resistance	ISO 10545-14
18	Moisture Resistance	Nil	Nil	ISO 10545-10
19	Glossiness	---	Min 65%-70% Reflection	Glossmeter

## PACKING DETAILS

SIZE	NO. OF TILES PER BOX	COVERAGE AREA
600 X 600 MM	4 PCS.	1.44 Sq. Mtr.

## APPLICATIONS



Airport



Gymnasium



Home



Hospital



Super Market



Multiplex



Hotel



School



Religion Place



Bank



Dance Hall



Industry